



Why senseFly

Intelligent integration
senseFly drones are ready to fly out of the box. Lightweight, safe & durable, these fully-integrated systems are powered by a single battery and managed by our aviation-quality autopilot.

Quality global support
senseFly drones include free software updates & efficient online support linked to local expert service centres. Further maintenance packages & extended warranty options are also available.

Education included
Our staff are experts in their fields, plus senseFly customers gain access to a wealth of educational materials, including bi-monthly senseFly Academy webinars and a full online Knowledge Base.

eMotion excellence
senseFly's eMotion is the most advanced flight planning & control software around. Built with safety in mind, it makes planning, simulation & monitoring automatic drone flights simple.

+530,000		FLIGHTS TO DATE
+150,000		FLIGHT HOURS
+26,700,000		HA COVERAGE

Technical specifications

HARDWARE	
Wingspan	110 cm (43.3 in)
Weight	1.1 kg (2.4 lb)
Motor	Low-noise, brushless, electric
Radio link range	3 km nominal (up to ¹ 8 km) / 1.86 mi (up to ¹ 4.97 mi)
Detachable wings	Yes
Sensor (supplied ²)	senseFly S.O.D.A.
Sensors (optional)	Parrot Sequoia, thermoMAP
Accessories (optional)	Radio tracker, backpack, camera protection kit
SOFTWARE	
Flight planning & control software (supplied)	eMotion 3
Image processing software (optional)	Pix4Dmapper
Pix4D output compatibility	AutoCAD, Trimble Business Center, Leica Geo Office, MAGNET Office Tools, ArcGIS, MicroStation & more
OPERATION	
Automatic 3D flight planning	Yes
Cruise speed	40 -110 km/h (11-30 m/s or 25-68 mph)
Wind resistance	Up to 45 km/h (12 m/s or 28 mph)
Maximum flight time	59 minutes
Automatic landing	Linear landing with ~ 5 m (16 ft) accuracy
Ground control points (GCPs) required	No (RTK/PPK activated), optional (RTK/PPK unactivated)
Hand launch (no catapult required)	Yes
RESULTS	
Nominal coverage ³ at 120 m (400 ft)	220 ha (540 ac)
Maximum coverage ⁴	40 km ² (15.4 mi ²)
Ground Sampling Distance	Down to 1 cm (0.4 in) / pixel
Absolute X, Y, Z accuracy (RTK/PPK activated or w/GCPs)	Down to 3 cm (1.2 in) / 5 cm (2 in)
Absolute X, Y, Z accuracy (no RTK/PPK, no GCPs)	1-5 m (3-16 ft)
senseFly S.O.D.A.	
Sensor type	RGB (20 megapixel)
Sensor size	1-inch (optical format)
Pixel pitch	2.33 µm
Shutter	Global
Ground resolution (at 122 m/400 ft AGL)	2.9 cm/px (1.1 in/px)
Dust & shock protection	Yes




eBee⁺

Aerial efficiency,
photogrammetric accuracy

3 reasons to choose the eBee Plus

- Large coverage for optimal efficiency**
The eBee Plus can map more square kilometres per flight, than any drone in its weight class, allowing you to maximise your efficiency and plan projects with confidence.
- High Precision on Demand (HPoD)**
The eBee Plus includes built-in RTK/PPK functionality that can be activated either out of the box or later when required. It's survey-grade accuracy *you* control, without the need for ground control points—for less time in the field and more time putting your data to work.
- Project-perfect payloads**
The eBee Plus offers a camera to suit every application, including the senseFly S.O.D.A. (supplied), the first camera designed for photogrammetric drone mapping.

¹ in ideal conditions
² optional in Turkey
³ flight height above ground level; results excl. reconstructible zone around planned area
⁴ based on 2,500 m (8,202 ft) flight altitude above ground level; results incl. reconstructible zone around planned area

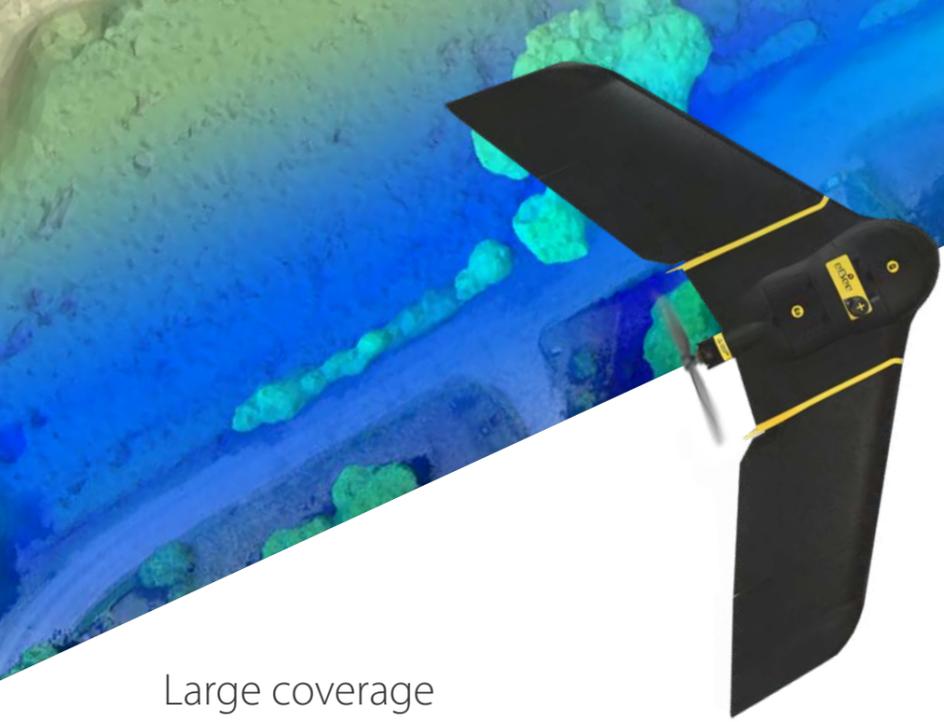

Large coverage for optimal efficiency

The lightweight, hand-launched eBee Plus is a seriously efficient data collection tool.

Its flight time of 59 minutes is a figure you can rely on: whichever camera you fly, at virtually any altitude, and in varying wind conditions. The result is less time spent flight planning and swapping batteries, and more time collecting exactly the geospatial data you need.

- > Confirmed real-world flight time: 59 minutes
- > Capable of mapping more, per flight, than any drone in its weight class:
 - Up to 2.2 km² (0.8 mi²) in a single 122 m (400 ft) flight
 - Up to 40 km² (15.4 mi²) maximum coverage



Includes eMotion 3!

eMotion 3 is senseFly's next-generation drone flight & data management software. It includes: mission block flight planning, efficient multi-flight missions, a full 3D control environment, multiple payload support, cloud connectivity & more...

Project-perfect payloads

The eBee Plus is a uniquely flexible tool. It is available with multiple camera payloads, so you need only invest in the configuration that suits your business' needs.

- > A sensor for every application:
 - **Professional-grade RGB:** surveying/geospatial
 - **Thermal infrared:** photovoltaic/rescue/environmental
 - **Multispectral:** agriculture/forestry/conservation
- > Supplied with senseFly S.O.D.A. (Sensor Optimised for Drone Applications)
- > Backwards-compatible with existing eBee sensors* (upgrade to eBee Plus to extend ground coverage while minimising your sensor costs)



senseFly S.O.D.A.
Sensor Optimised for Drone Applications

The senseFly S.O.D.A. is the first camera to be designed for professional drone photogrammetry. It captures amazingly sharp aerial RGB images, across a range of light conditions, allowing you to produce detailed, vivid orthomosaics and highly precise digital surface models.

*select cameras may only support standalone GNSS mode



Orthomosaic overlaid on DSM. GSD: 3 cm (1.2 in)/pixel. Coverage: 72 ha (178 ac). Flight height: 122 m (400 ft) AGL.

High Precision on Demand (HPoD)

The eBee Plus features High Precision on Demand (HPoD) thanks to its built-in RTK/PPK functionality. You can activate this whenever it suits your business—right out of the box, or later. It's survey-grade accuracy *you* control, without the need for ground control points—for less time in the field and more time putting your data to work.

- ✓ On-demand survey-grade outputs—without ground control points
- ✓ Absolute orthomosaic & digital surface model accuracy of down to 3 cm (1.2 in)
- ✓ Achievable across virtually every site
- ✓ Employ your existing reference station & GNSS knowledge

